

DESCRIPTION : AIR POWERED HORN

Main specifications and performances

Sound pressure level	117 (2m)	dB(A)
Frequency	260	Hz
Working Pressure	500 - 1000	kPa
Operating temperature	-30° to +80°	°C
Storage temperature	-40° to +85°	°C
Corrosion resistance	> 1000 (salt spray test)	Hours
Operating relative humidity	30 to 95	%
Durability (1 sec ON, 4 sec OFF)	>100,000	Cycles
Continuous blowing	60	min
Vibration (30 min, 3 axis)	1	g
Weight (each)	250	g
Main Materials	Polypropylene + fiberglass	
Main applications	Trucks	

Pneumatic connection

Tube 4 x 6

Conformity to Standards of:


PRODUCT	REG. 28 ECE
MANUFACTURING	ISO/TS 16949
	ISO 9001
	ISO 14001

Part Number

6242012

HIGH POWERED AIR HORN

Dimensions (mm)

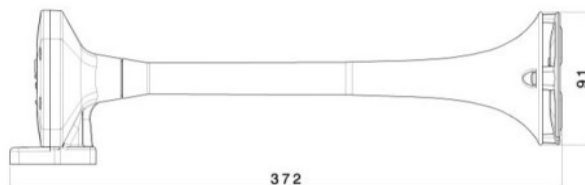

Other specifications

Mechanical connection: flat and rigid surface facing the bracket edge

Horn's Protection: choose an installation area protected from direct water and mud splash

