


## DESCRIPTION : ELECTROMAGNETIC HORN

24

### Main specifications and performances

Nominal voltage	24	Vdc
Voltage range	23-27.6	Vdc
Current consumption	8	A
Produced Pressure	17	psi
Operating temperature	-30°C to +80	°C
Storage temperature	-30°C to +80	°C
Corrosion resistance	> 480 (salt spray test)	Hours
Operating relative humidity	30 to 80	%
Durability (1 sec ON, 4 sec OFF)	>50000	Cycles
Continuous blowing	> 3	min
Electrical insulation	500	Vdc
Vibration (30 min, 3 axis)	1	g
Weight (each)	810	gr
Main Materials	ABS, Steel, Aluminum	
Main applications	Cars, Trucks, Motorcycles, Special Vehicles	

### Dimensions (mm)

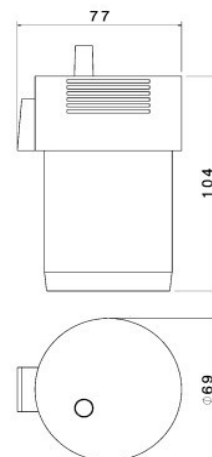

### Available Electrical Connection

Double Pole Terminal 6.3 x 0.8 mm



### Other specifications

**Mechanical connection:** flat and rigid surface facing the bracket edge

**Horn's Protection:** choose an installation area protected from direct water and mud splash

### Conformity to Standards of:

CEE 70/388  
 REG. 28 ECE  
 CEE 2009/19  
 REG.10 ECE

Part Number

0821522

